

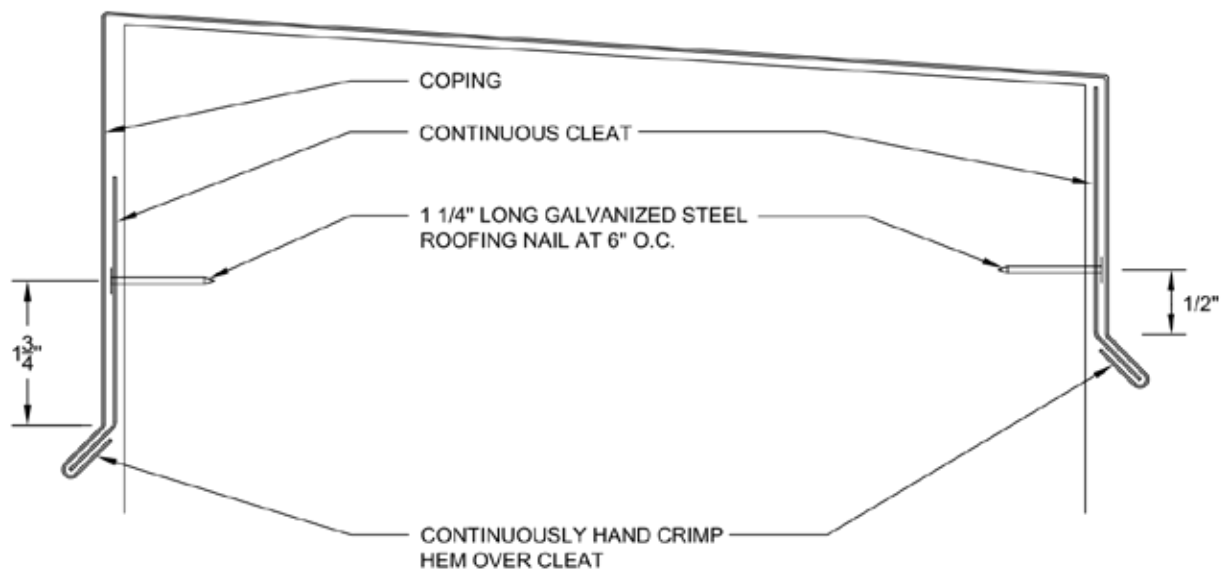



<b>THE NRCA ROOFING MANUAL</b> CONSTRUCTION DETAIL C-1	<b>COPING</b> • 24 GA. STEEL • 22 GA. STEEL CLEAT • CONTINUOUS FRONT FACE AND BACK FACE CLEAT	<b>ANSI/SPRI ES-1 TESTED RESISTANCE</b>		<b>UL-10</b>  10/30/15
		OUTWARD 145 LBS./SQ. FT.	UPWARD 240 LBS./SQ. FT.	

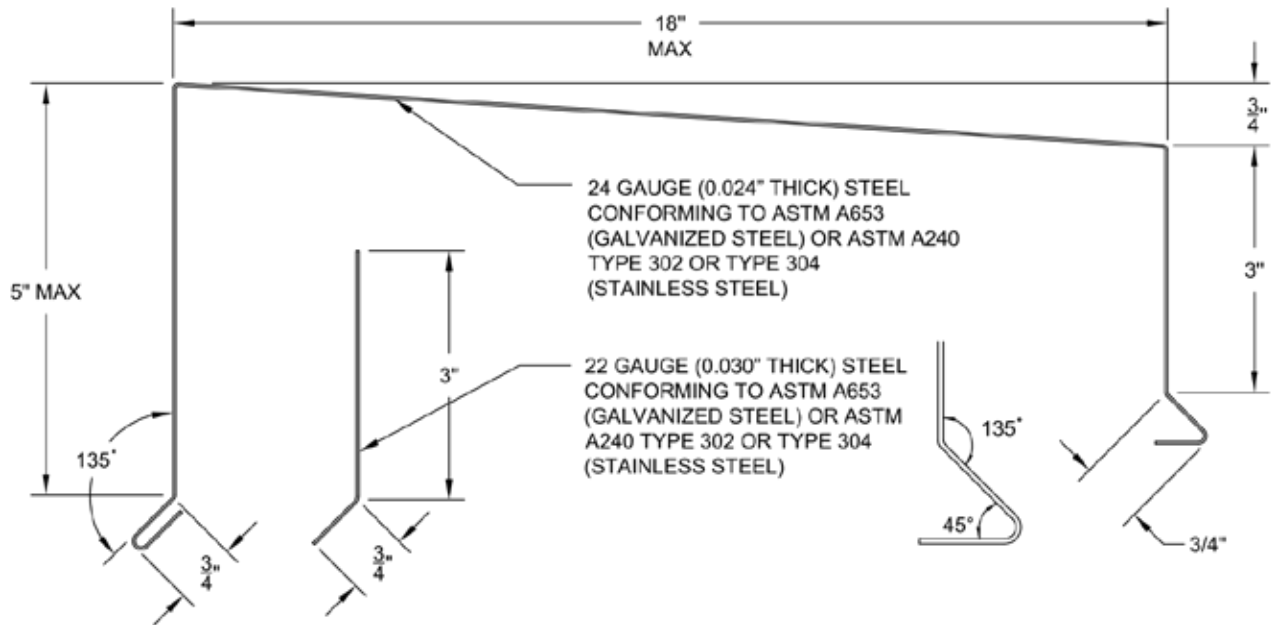

<b>THE NRCA ROOFING MANUAL</b> CONSTRUCTION DETAIL C-2	<b>COPING</b> • 24 GA. STEEL • 22 GA. STEEL CLEAT • CONTINUOUS FRONT FACE AND BACK FACE CLEAT	<b>ANSI/SPRI ES-1 TESTED RESISTANCE</b>		<b>UL-10A</b>  10/30/15
		OUTWARD 145 LBS./SQ. FT.	UPWARD 240 LBS./SQ. FT.	

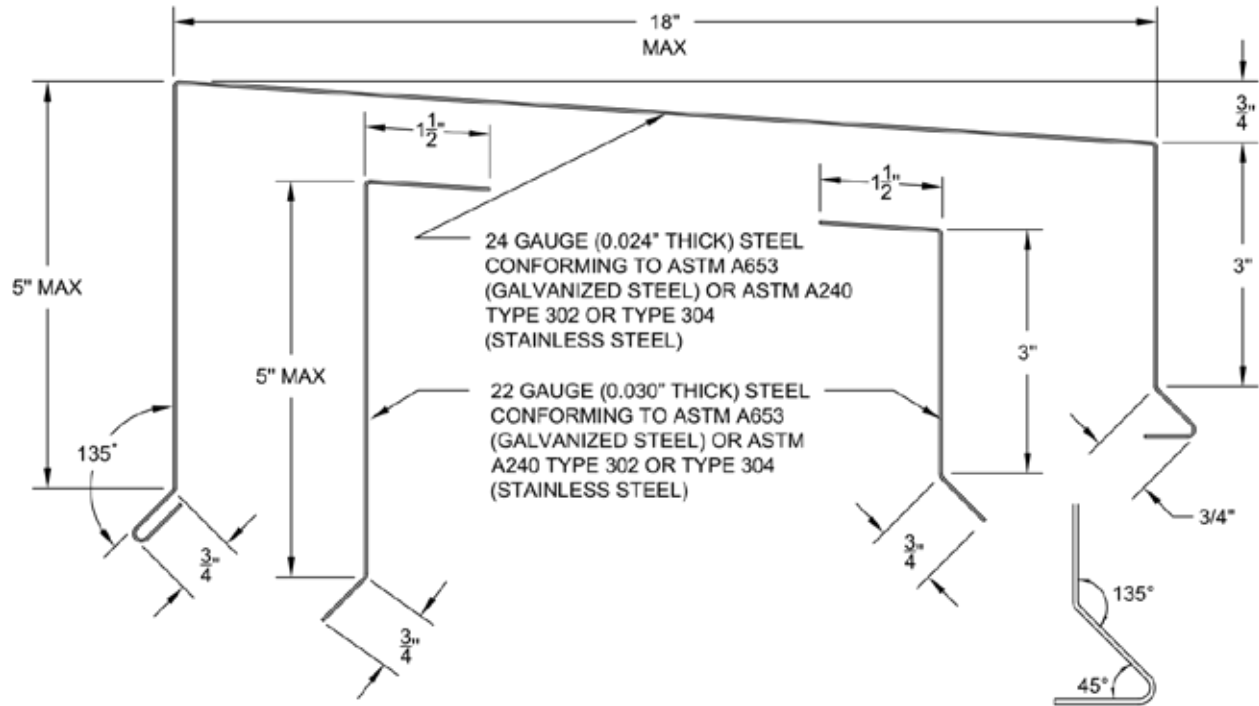


**FABRICATION**

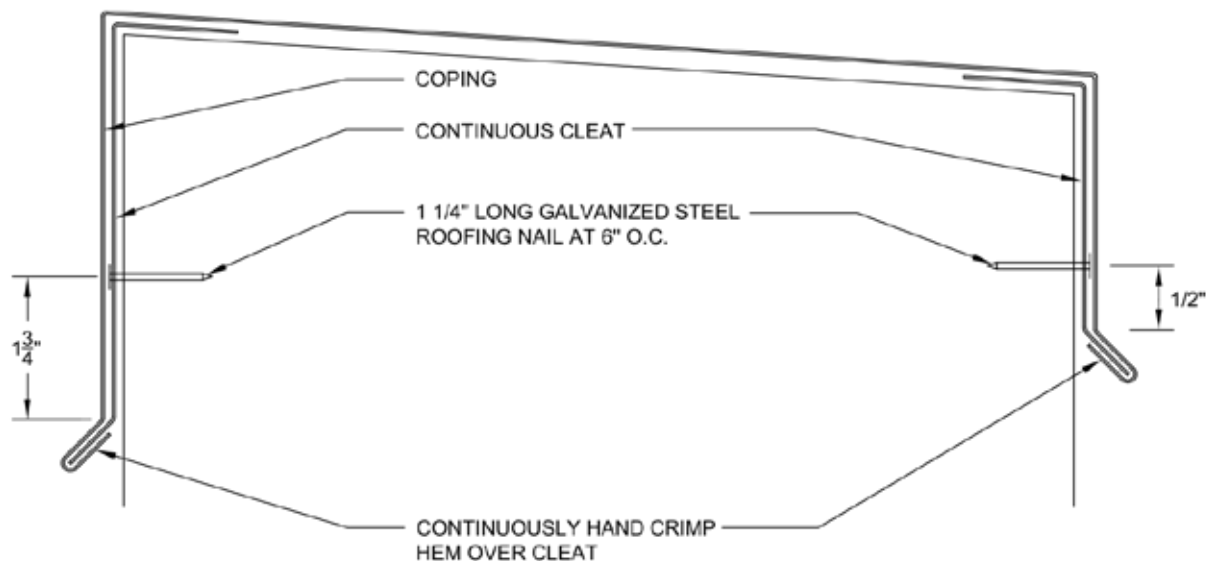


**INSTALLATION**

<b>THE NRCA ROOFING MANUAL</b> CONSTRUCTION DETAIL C-2	<b>COPING</b> • 0.040" ALUMINUM • 0.050" ALUMINUM CLEAT • CONTINUOUS FRONT FACE AND BACK FACE CLEAT	<b>ANSI/SPRI ES-1 TESTED RESISTANCE</b>		<b>UL-11A</b>  2/6/17
		OUTWARD 145 LBS./SQ. FT.	UPWARD 240 LBS./SQ. FT.	

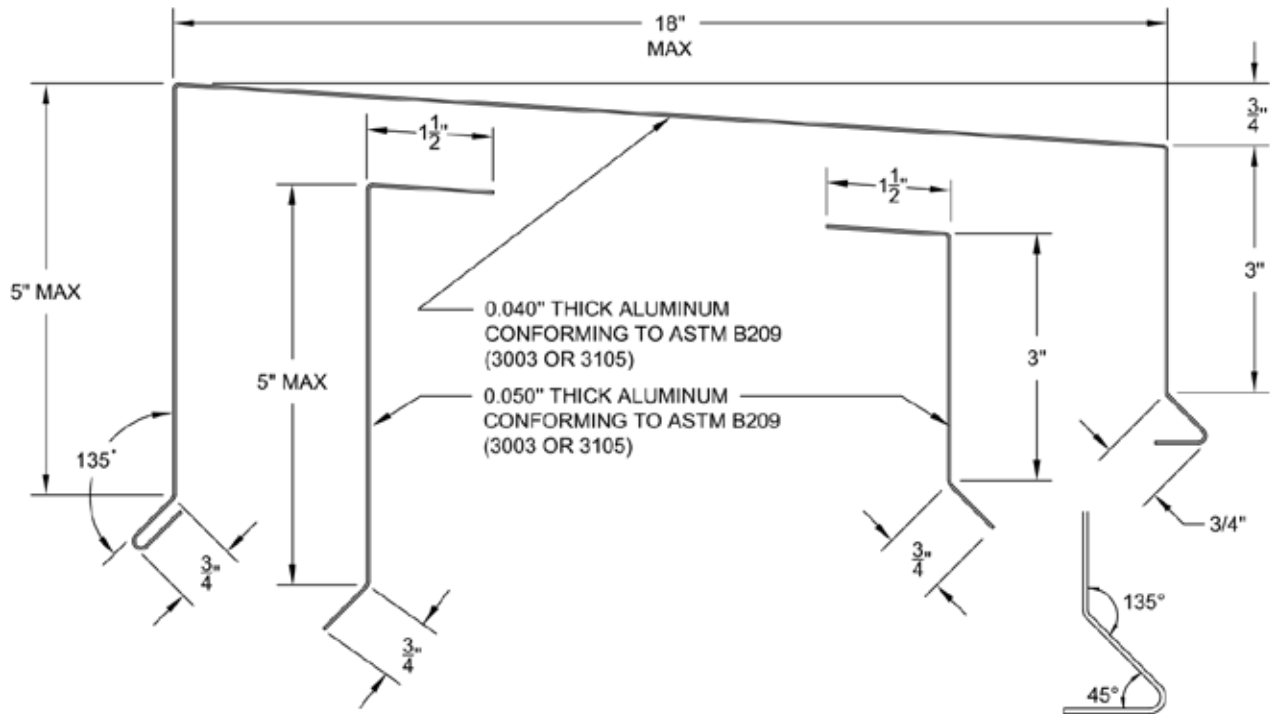

**FABRICATION**

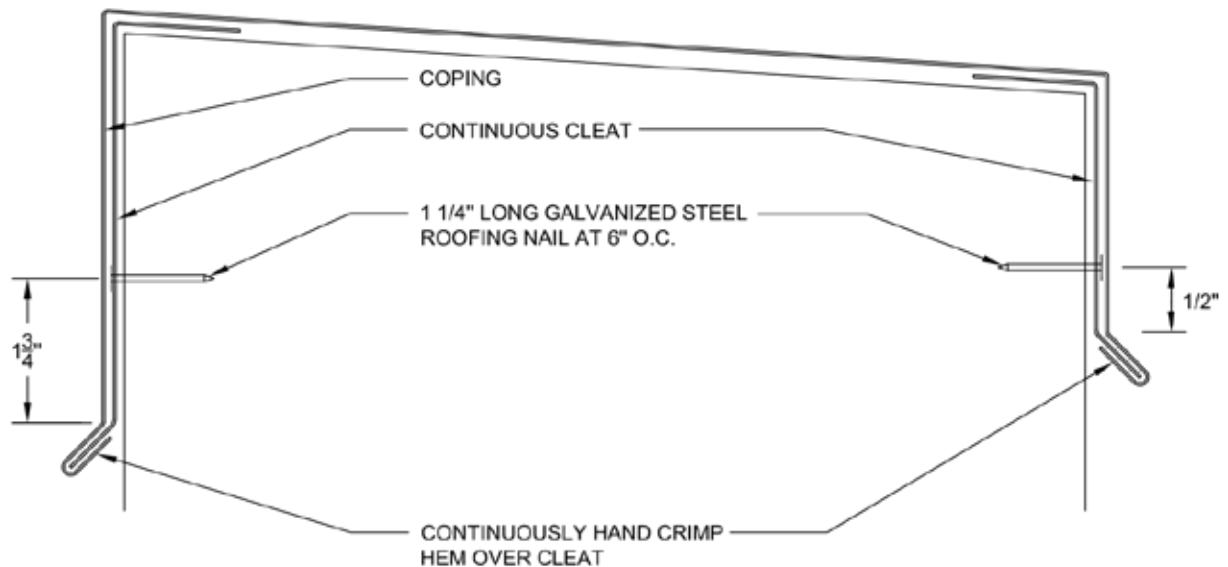

**INSTALLATION**