



<b>THE NRCA ROOFING MANUAL</b> CONSTRUCTION DETAIL C-6	<b>COPING WITH FLAT DRIP</b> <ul style="list-style-type: none"> <li>• 24 GA. STEEL</li> <li>• 22 GA. STEEL CLEAT</li> <li>• CONTINUOUS FRONT FACE CLEAT AND GASKETED BACK FACE FASTENER</li> </ul>	<b>ANSI/SPRI ES-1 TESTED RESISTANCE</b>		<b>UL-14</b>  10/30/15
		OUTWARD 235 LBS./SQ. FT.	UPWARD 390 LBS./SQ. FT.	


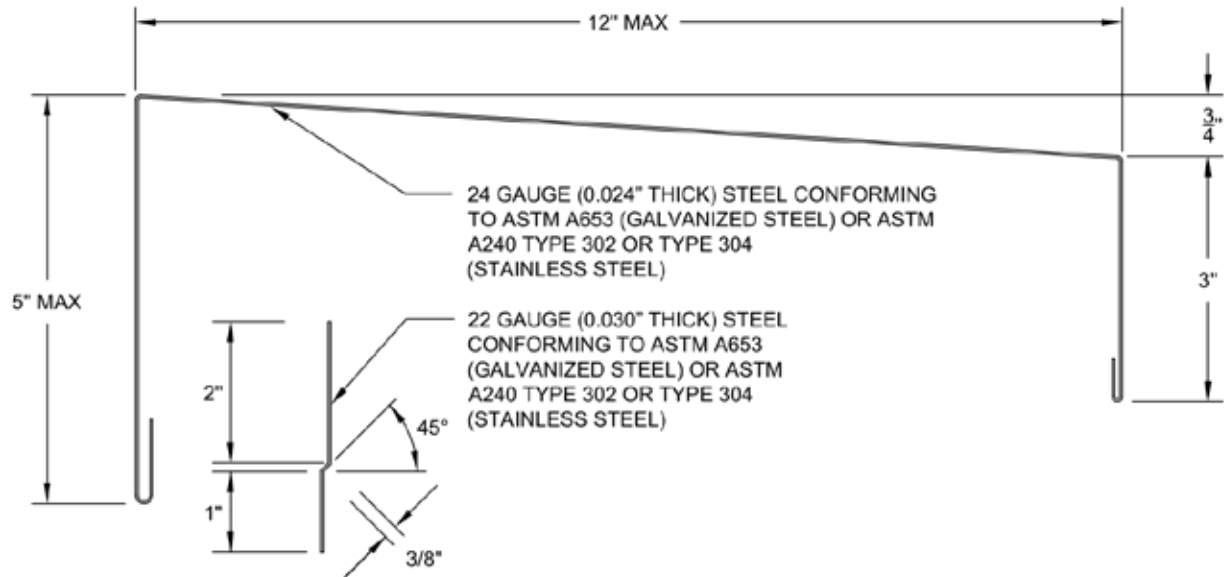


### FABRICATION

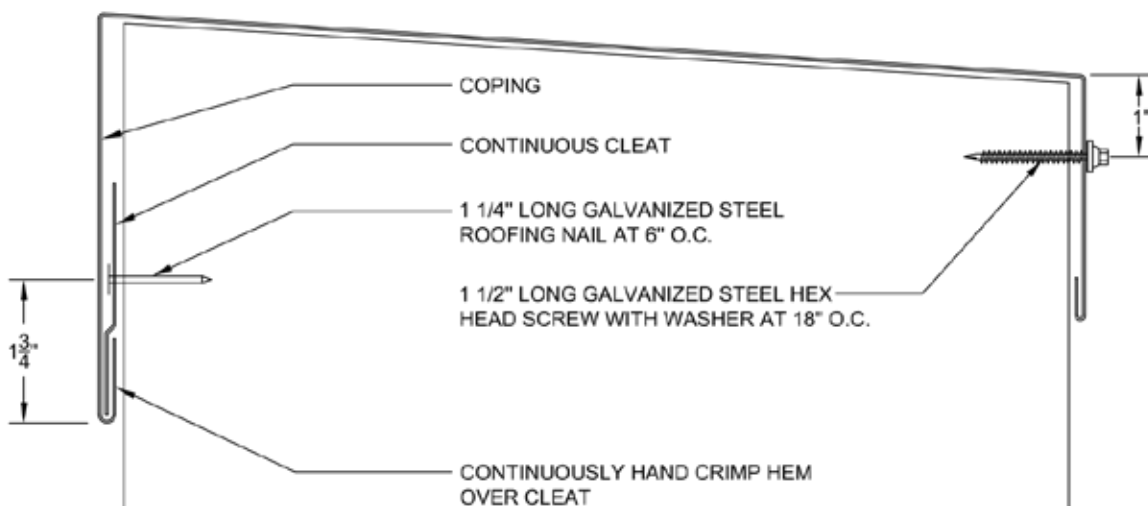


### INSTALLATION


<b>THE NRCA ROOFING MANUAL</b> CONSTRUCTION DETAIL C-7	<b>COPING WITH FLAT DRIP</b> <ul style="list-style-type: none"> <li>• 24 GA. STEEL</li> <li>• 22 GA. STEEL CLEAT</li> <li>• CONTINUOUS FRONT FACE CLEAT AND GASKETED BACK FACE FASTENER</li> </ul>	<b>ANSI/SPRI ES-1 TESTED RESISTANCE</b>		<b>UL-14A</b>  10/30/15
		OUTWARD 235 LBS./SQ. FT.	UPWARD 390 LBS./SQ. FT.	

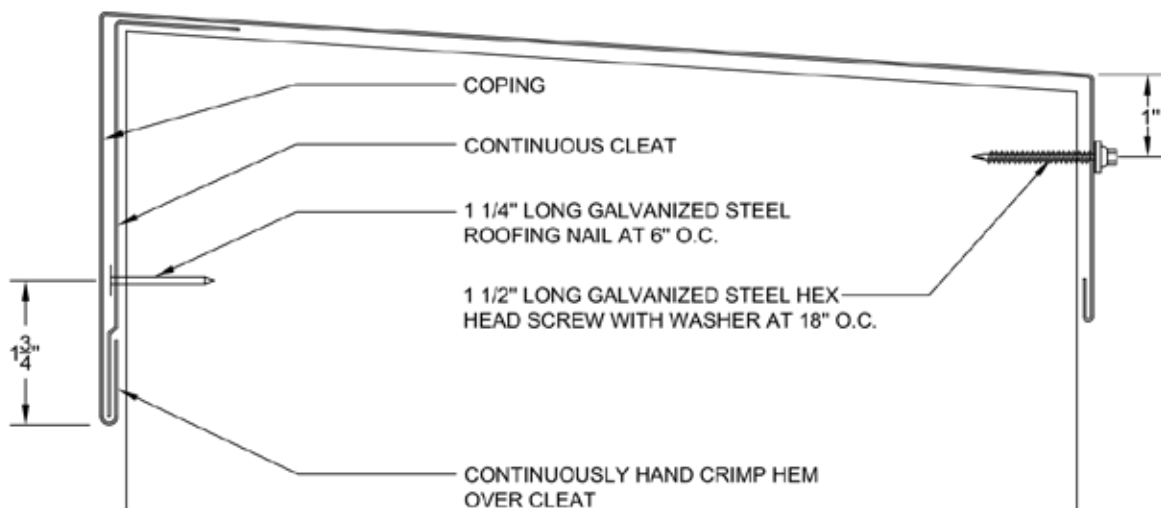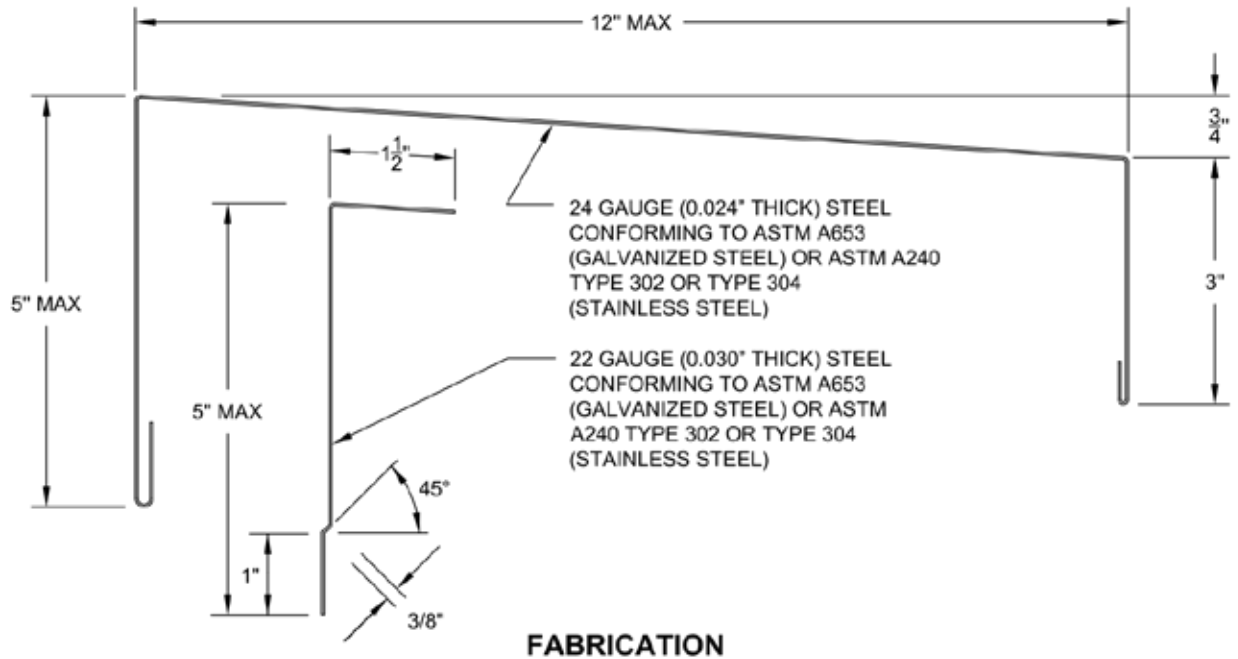

<b>THE NRCA ROOFING MANUAL</b> CONSTRUCTION DETAIL C-6	<b>COPING WITH FLAT DRIP</b> • 0.040" ALUMINUM • 0.040" ALUMINUM CLEAT • CONTINUOUS FRONT FACE CLEAT AND GASKETED BACK FACE FASTENER	<b>ANSI/SPRI ES-1 TESTED RESISTANCE</b>  OUTWARD      UPWARD 225 LBS./SQ. FT.    400 LBS./SQ. FT.	<b>UL-15</b>  2/6/17

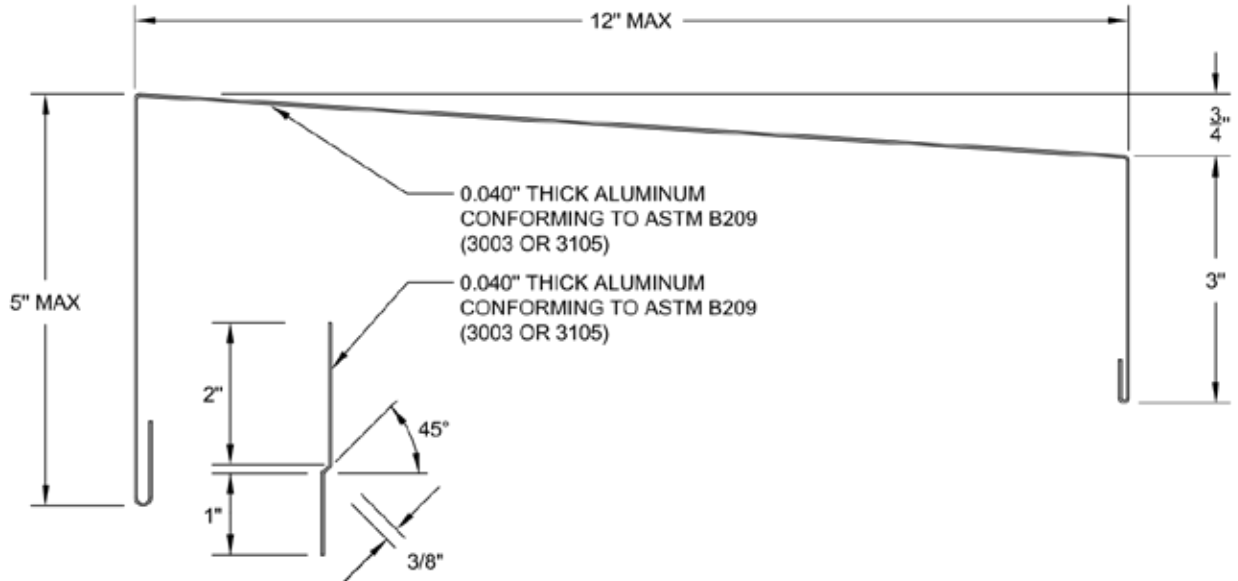

**FABRICATION**

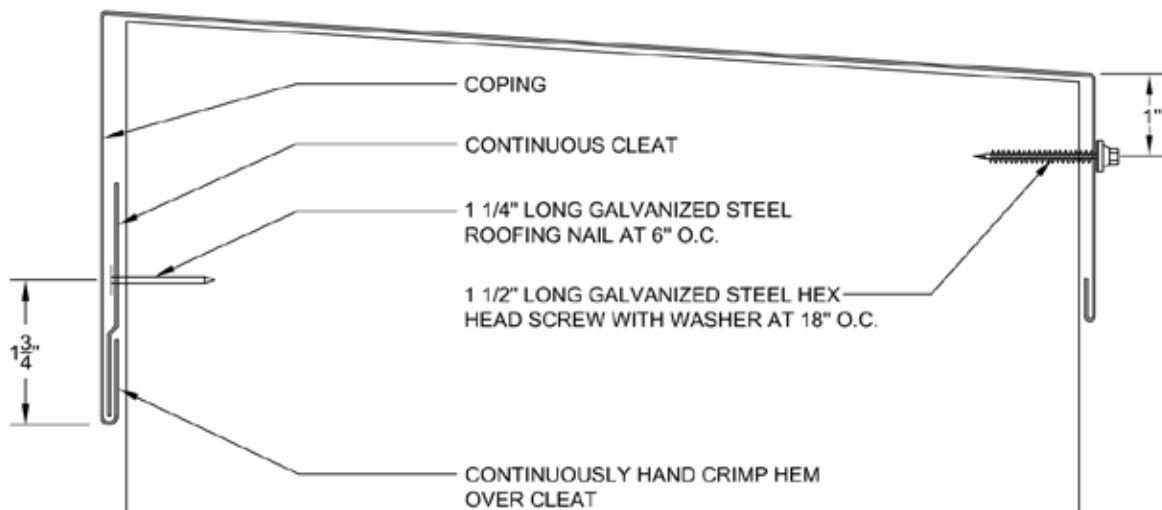

**INSTALLATION**

<b>THE NRCA ROOFING MANUAL</b> CONSTRUCTION DETAIL C-7	<b>COPING WITH FLAT DRIP</b> <ul style="list-style-type: none"> <li>• 0.040" ALUMINUM</li> <li>• 0.040" ALUMINUM CLEAT</li> <li>• CONTINUOUS FRONT FACE CLEAT AND GASKETED BACK FACE FASTENER</li> </ul>	<b>ANSI/SPRI ES-1 TESTED RESISTANCE</b>	<b>UL-15A</b>  2/6/17
		OUTWARD 225 LBS./SQ. FT.      UPWARD 400 LBS./SQ. FT.	

