



<b>THE NRCA ROOFING MANUAL</b> CONSTRUCTION DETAIL EE-1	<b>EMBEDDED EDGE (A-TYPE)</b> <ul style="list-style-type: none"> <li>• 24 GA. STEEL</li> <li>• 22 GA. STEEL CLEAT</li> <li>• CONTINUOUS FRONT FACE CLEAT</li> </ul>	<b>ANSI/SPRI ES-1 TESTED RESISTANCE</b>	<b>UL-25</b>  10/30/15
		210 LBS./SQ. FT.	

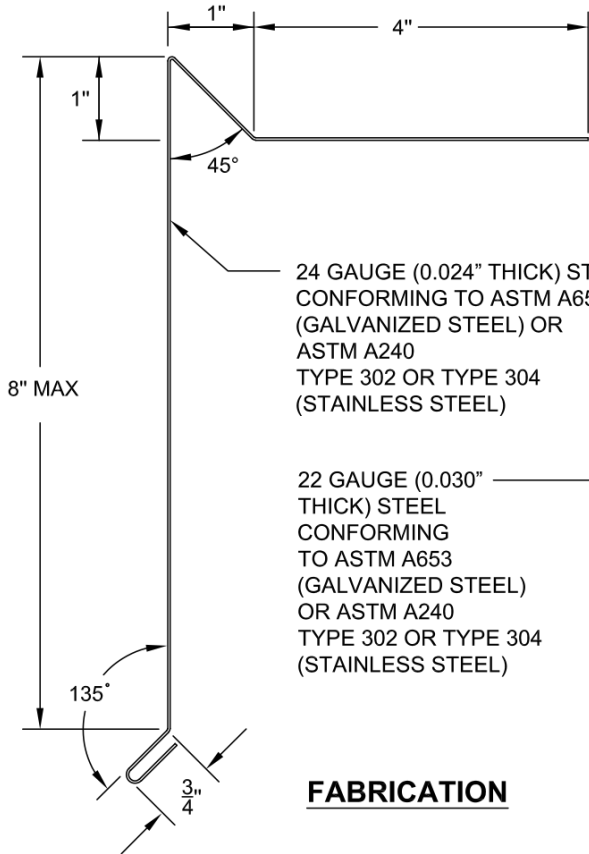


**FABRICATION**

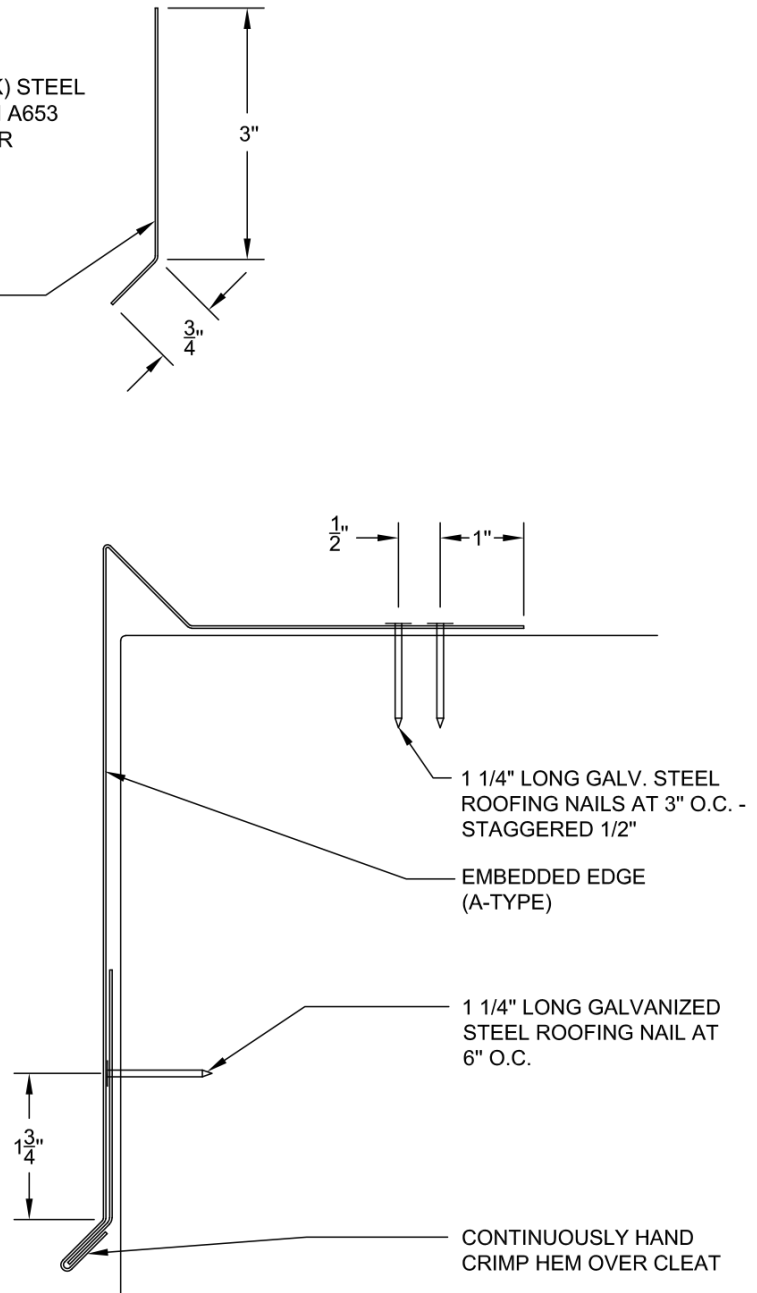

**INSTALLATION**


<b>THE NRCA ROOFING MANUAL</b> CONSTRUCTION DETAIL EE-2	<b>EMBEDDED EDGE (A-TYPE)</b> <ul style="list-style-type: none"> <li>• 24 GA. STEEL</li> <li>• 22 GA. STEEL CLEAT</li> <li>• CONTINUOUS FRONT FACE CLEAT</li> </ul>	ANSI/SPRI ES-1 TESTED RESISTANCE	<b>UL-25A</b>  10/30/15
		210 LBS./SQ. FT.	

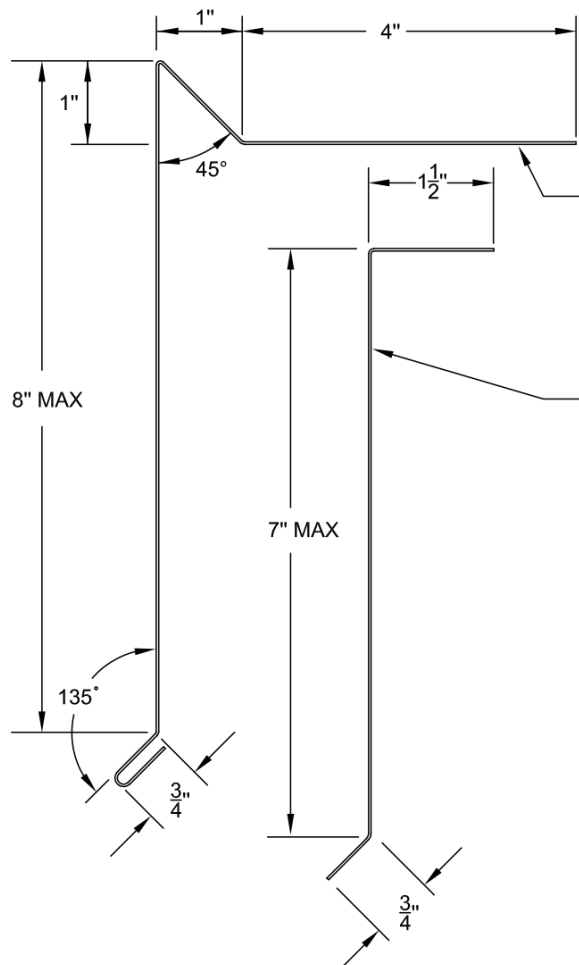

**FABRICATION**



24 GAUGE (0.024" THICK) STEEL  
CONFORMING TO ASTM A653  
(GALVANIZED STEEL) OR  
ASTM A240  
TYPE 302 OR TYPE 304  
(STAINLESS STEEL)

22 GAUGE (0.030" THICK) STEEL  
CONFORMING TO ASTM A653  
(GALVANIZED STEEL) OR  
ASTM A240  
TYPE 302 OR TYPE 304  
(STAINLESS STEEL)

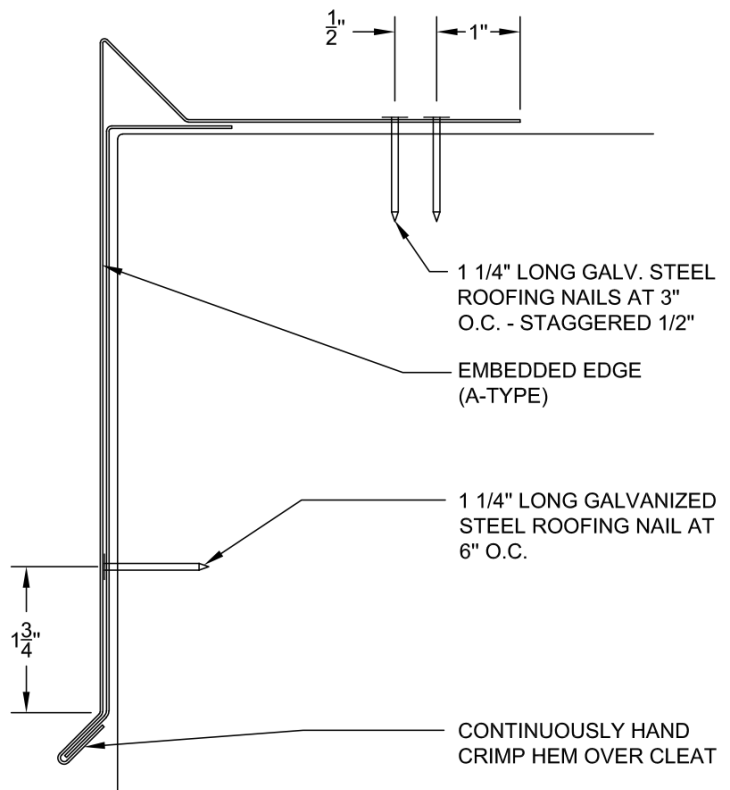


**INSTALLATION**


<b>THE NRCA ROOFING MANUAL</b> CONSTRUCTION DETAIL EE-1	<b>EMBEDDED EDGE (A-TYPE)</b> <ul style="list-style-type: none"> <li>• 0.040" ALUMINUM</li> <li>• 0.040" ALUMINUM CLEAT</li> <li>• CONTINUOUS FRONT FACE CLEAT</li> </ul>	<b>ANSI/SPRI ES-1 TESTED RESISTANCE</b>	<b>UL-26</b>  2/6/17
		230 LBS./SQ. FT.	

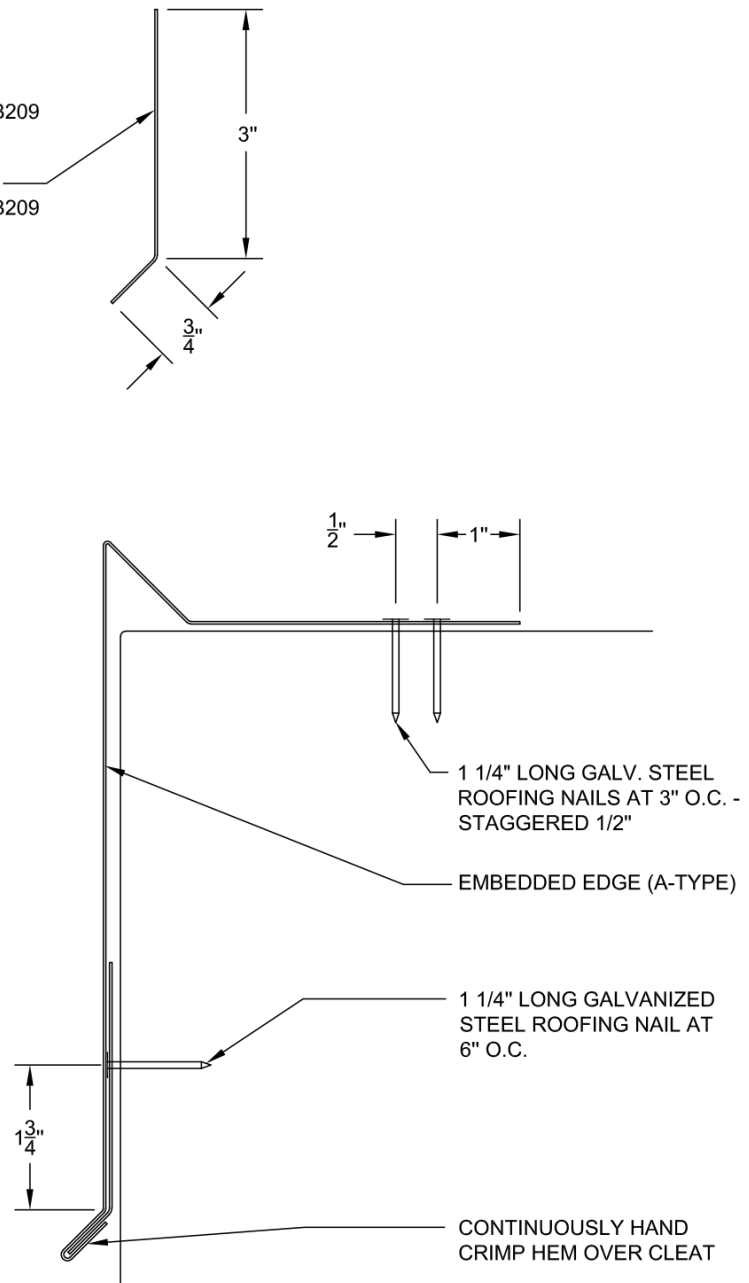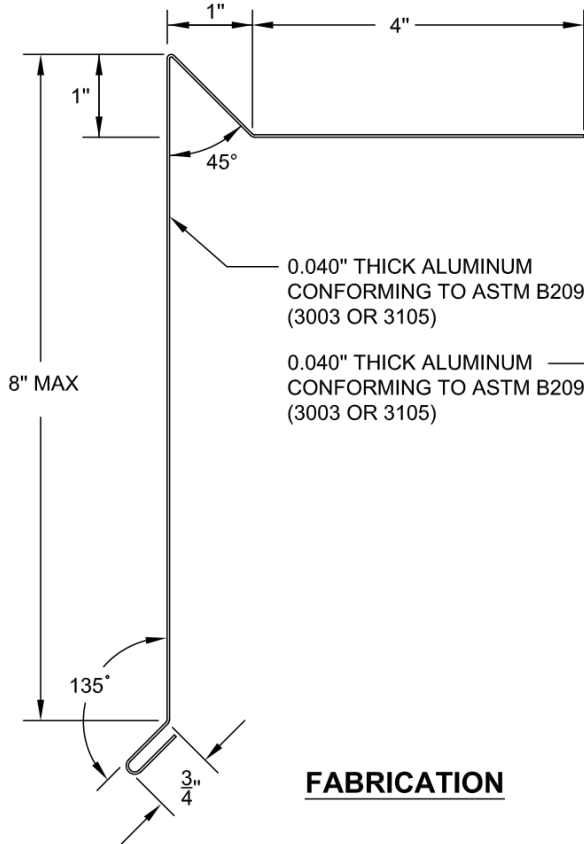

<b>THE NRCA ROOFING MANUAL</b> CONSTRUCTION DETAIL EE-2	<b>EMBEDDED EDGE (A-TYPE)</b> <ul style="list-style-type: none"> <li>• 0.040" ALUMINUM</li> <li>• 0.040" ALUMINUM CLEAT</li> <li>• CONTINUOUS FRONT FACE CLEAT</li> </ul>	<b>ANSI/SPRI ES-1 TESTED RESISTANCE</b>	<b>UL-26A</b>  2/6/17
		230 LBS./SQ. FT.	


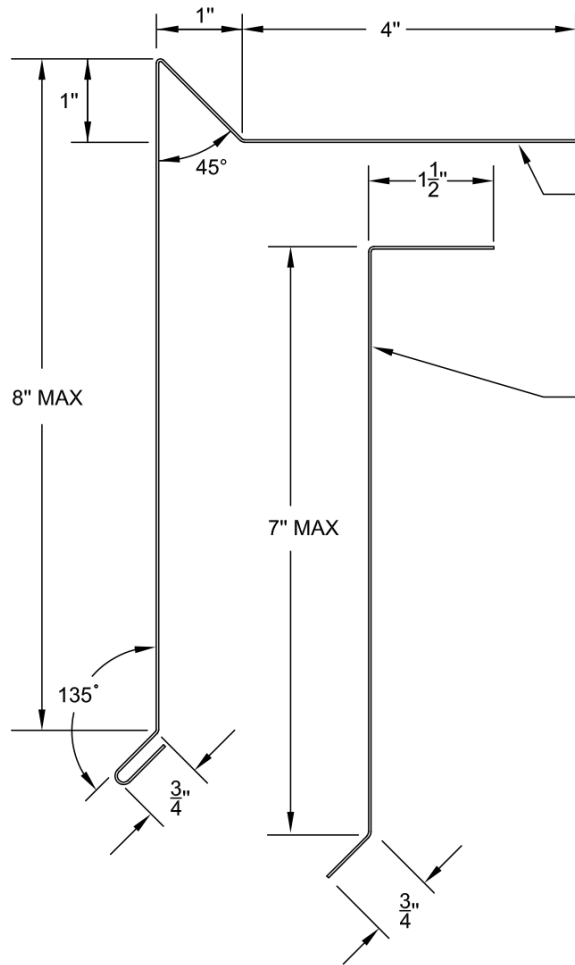


**FABRICATION**

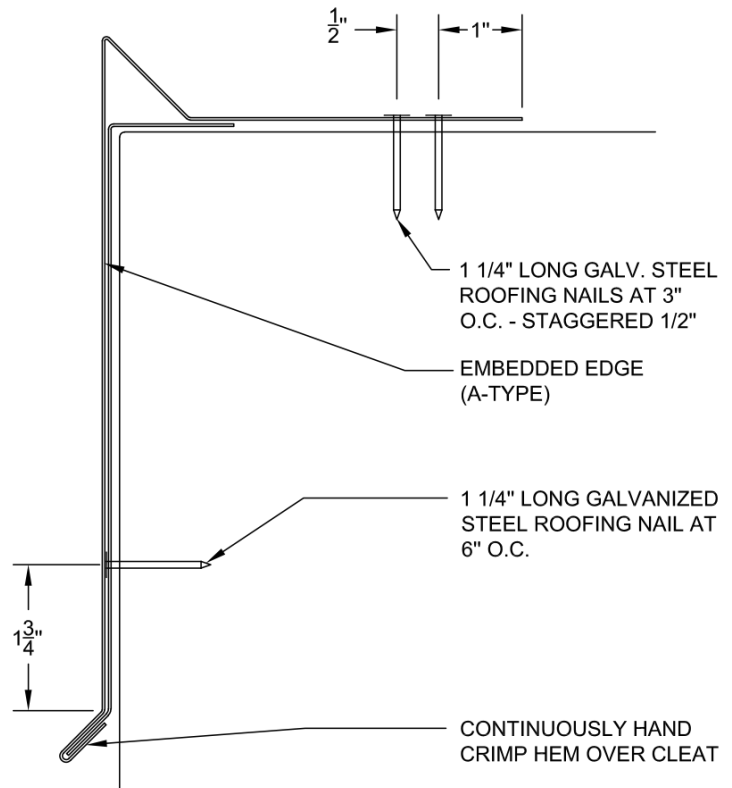


**INSTALLATION**


<b>THE NRCA ROOFING MANUAL</b> CONSTRUCTION DETAIL EE-1	<b>EMBEDDED EDGE (A-TYPE)</b> <ul style="list-style-type: none"> <li>• 0.040" ALUMINUM</li> <li>• 0.050" ALUMINUM CLEAT</li> <li>• CONTINUOUS FRONT FACE CLEAT</li> </ul>	<b>ANSI/SPRI ES-1</b> TESTED RESISTANCE	<b>UL-27</b>  2/6/17
		200 LBS./SQ. FT.	

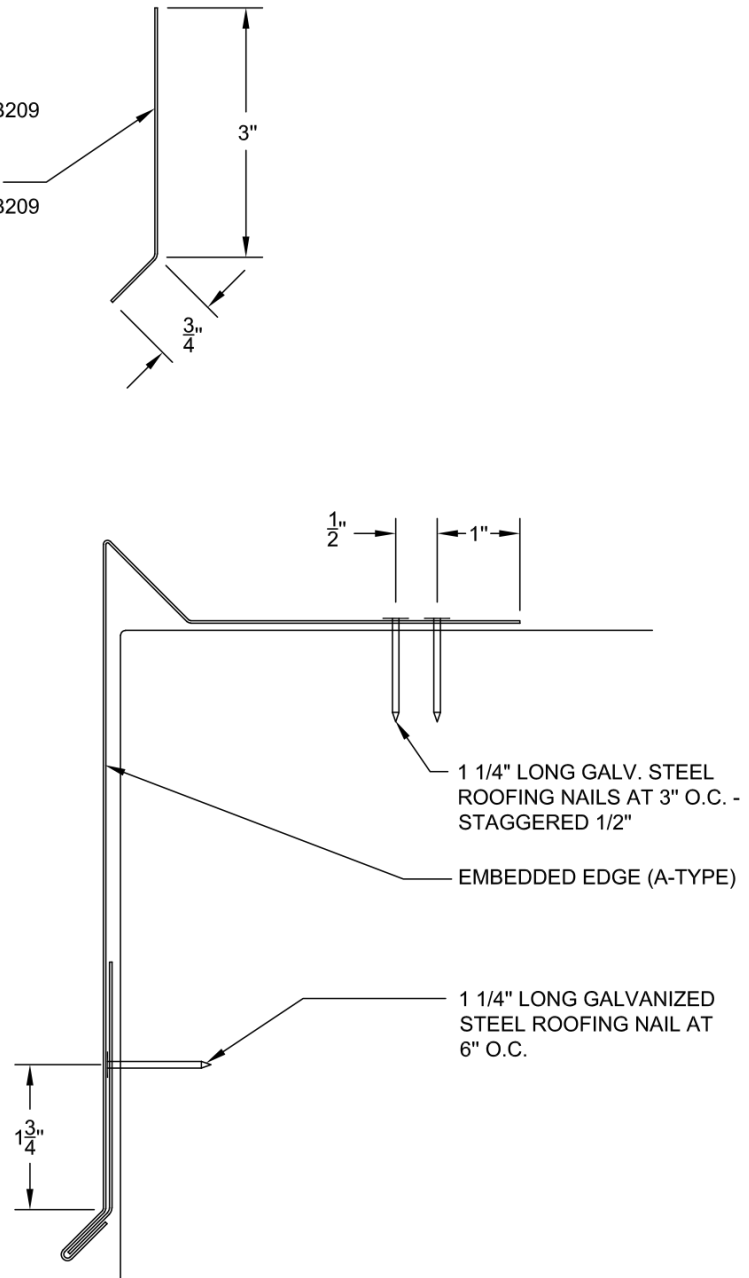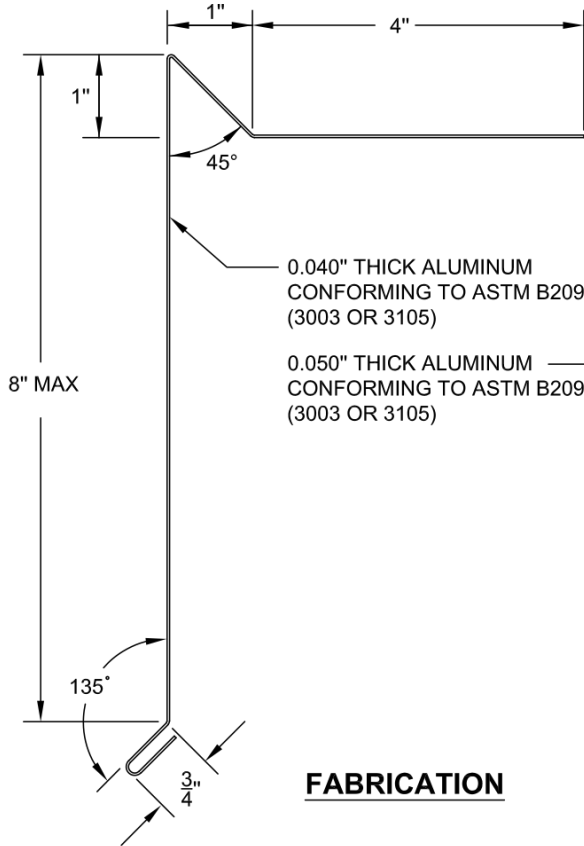

<b>THE NRCA ROOFING MANUAL</b> CONSTRUCTION DETAIL EE-2	<b>EMBEDDED EDGE (A-TYPE)</b> <ul style="list-style-type: none"> <li>• 0.040" ALUMINUM</li> <li>• 0.050" ALUMINUM CLEAT</li> <li>• CONTINUOUS FRONT FACE CLEAT</li> </ul>	<b>ANSI/SPRI ES-1 TESTED RESISTANCE</b>	<b>UL-27A</b>  5/22/14
		200 LBS./SQ. FT.	

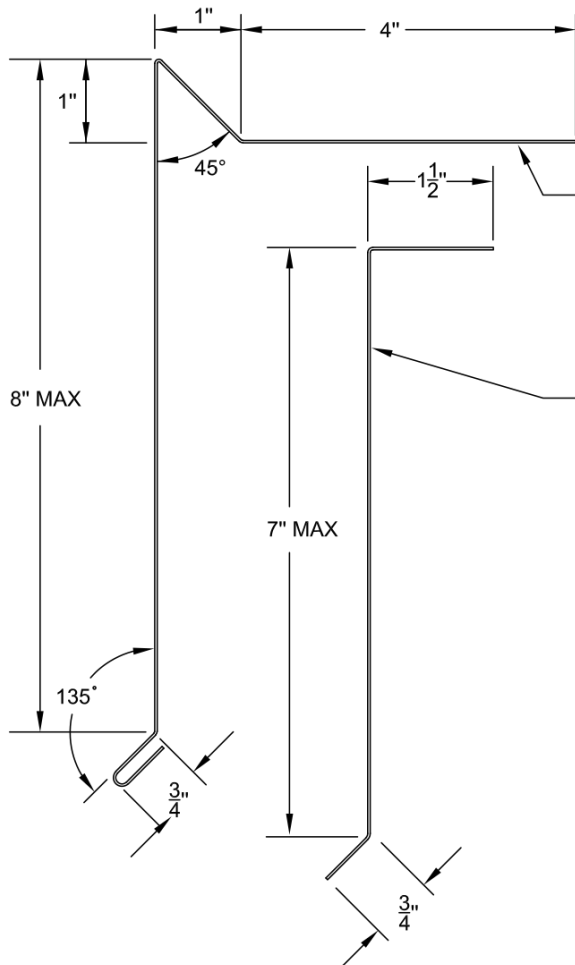

**FABRICATION**

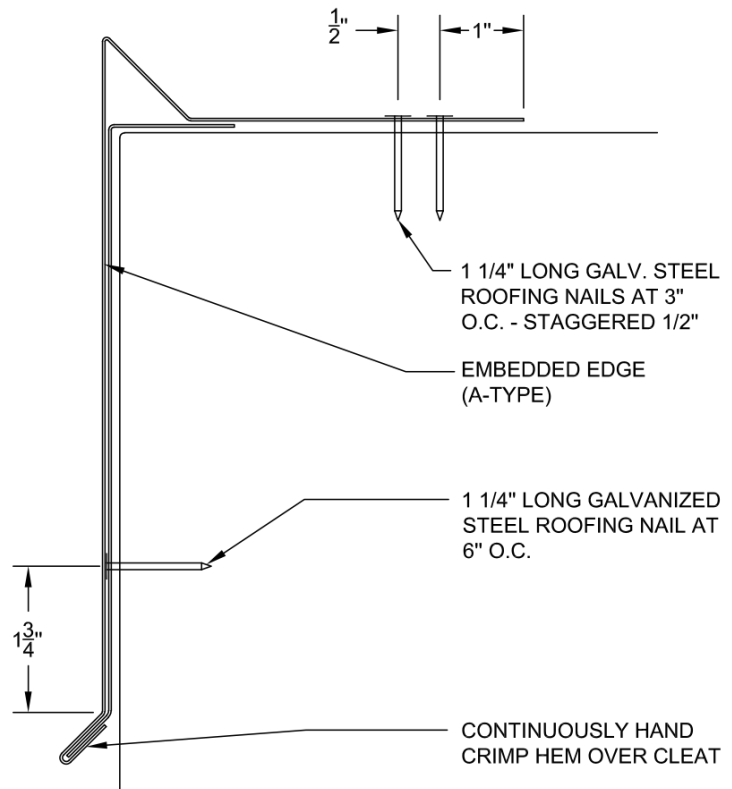

**INSTALLATION**